


# FACTOR



## OSTRO Specification

	Brand	Model	Specification
Frame	Factor	OSTRO	TeXtreme®, Toray®, Nippon Graphite Pitch-Based Fiber
Fork	Factor	OSTRO	Svelte Disc
Seat Post	Factor	OSTRO	Zero and 25mm setback available
Barstem	Black Inc.	VAM	Reach 80mm, drop 125mm. Multiple stem lengths and bar widths available
Headset	CeramicSpeed	110 Series	1-1/8" bearings
Head Tube Diameter			1-1/8 upper and 1-3/8 lower
BB	CeramicSpeed	T47A	Aluminium cups / CeramicSpeed bearings with Wheels MFG 24mm BBRight Reducers/Adapters
Max Tire Clearance			32mm
Wheel Size			700c
Brake Type			Disc
Front Axle			12 x 100mm thru-axle
Rear Axle			12 x 142mm thru-axle
Cable Routing			Internal
Finish/Color			Flicker, Sicilian Peach, Soho Mix
Manufacturer Warranty			5 year limited lifetime warranty

# FACTOR

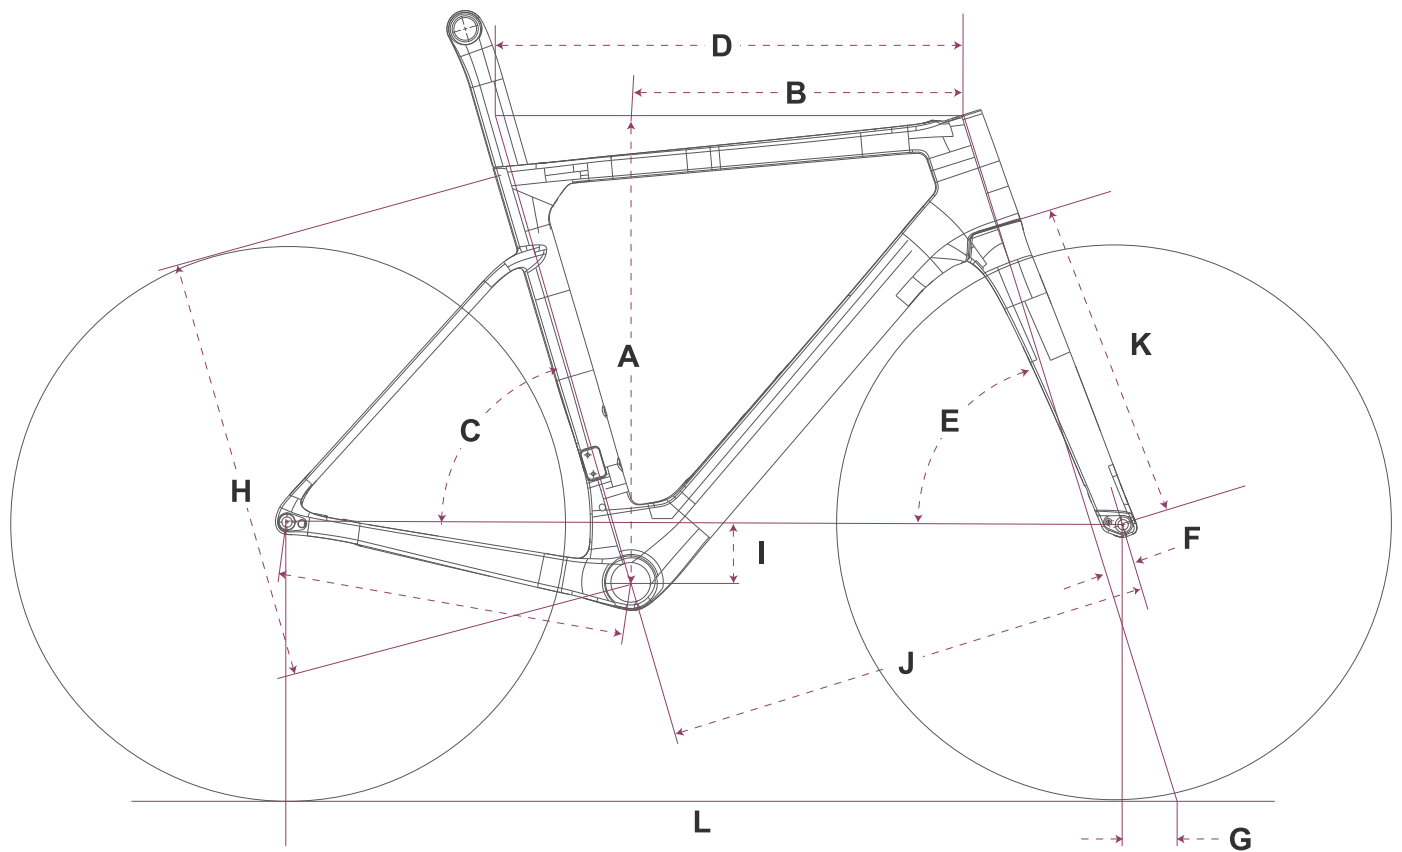

## OSTRO

Size	49	52	54	56	58
A Stack	503	523	542	565	587
B Reach	370	376	384	392	401
C Seat Tube Angle	74.5	74	73	73	73
D TT (effective)	511	527	550	566	582
E HT angle	71.7	72.5	72.5	73.3	73.3
F Fork Offset	53	48	48	43	43
G Trail (@683OD)	57.1	57.3	57.3	57.5	57.5
H ST	456	480	502	525	548
I BB drop	72	72	70	70	70
J Front Center	574	575	587	591	607
K Fork length	373	373	373	373	373
L Wheelbase	968	968	982	985	1005

\*All dimensions in mm